

BALUN TRANSFORMER




- ◆ Excellent EMI performance
- ◆ Suitable for reflow soldering
- ◆ Current-compensated double choke
- ◆ High rated currents, reduced components height
- ◆ Comply with ROHS

ELECTRICAL SPECIFICATIONS@25°C (Operating Temperature :-40°C to 100°C)

Part Number	Turns Ratio @20KHz,1V	Insertion Loss (Pin1 – Pin6)			Input Return Loss (Pin1)		
		5 - 50 MHz	50 - 205 MHz	205 - 300 MHz	5 - 50 MHz	50 - 205 MHz	205 - 300 MHz
TM11088ST	1.4:1±2%	0.6 dB Max	1.5 dB Max	2.2 dB Max	20 dB Min	8 dB Min	6 dB Min

MECHANICAL(Unit:mm)

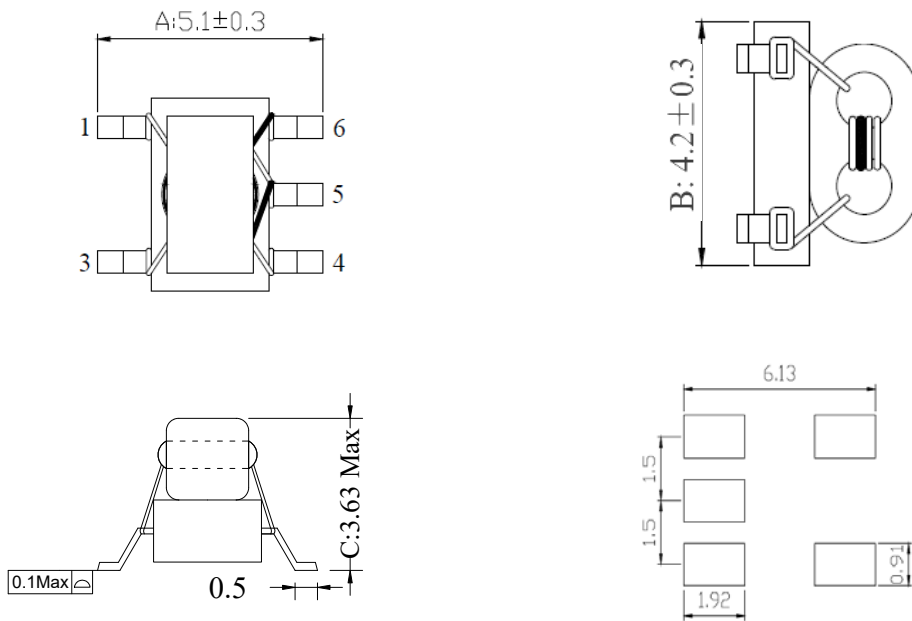

SCHEMATICS

