

100/1000BASE-T FIVE TRANSFORMER MODULES

- ◆ Compliant with IEEE802.3 and ANSI X3.263 standards
Including 350uH OCL with 8mA Bias.
- ◆ Five Channel Interface For 100/1000 Mbps Ethernet Applications
- ◆ Comply With ROHS




ELECTRICAL SPECIFICATIONS@25°C (Operating Temperature :0°C to 70°C)

Part Number	Turns Ratio ±5%	Insertion Loss(dB max) 1-100MHz	Return Loss (dB min)				CMRR (dB min)			Cross Talk (dB min)			Hipot (vrms)
			1-30 MHz	30-60 MHz	30-60 MHz	80-100 MHz	1-30 MHz	30-60 MHz	60-100 MHz	1-30 MHz	30-60 MHz	60-100 MHz	
G90601DK-R	1:1	-1.0	-18	-14	-12	-10	-40	-35	-30	-45	-35	-30	1500

MECHANICAL

G90601DK-R

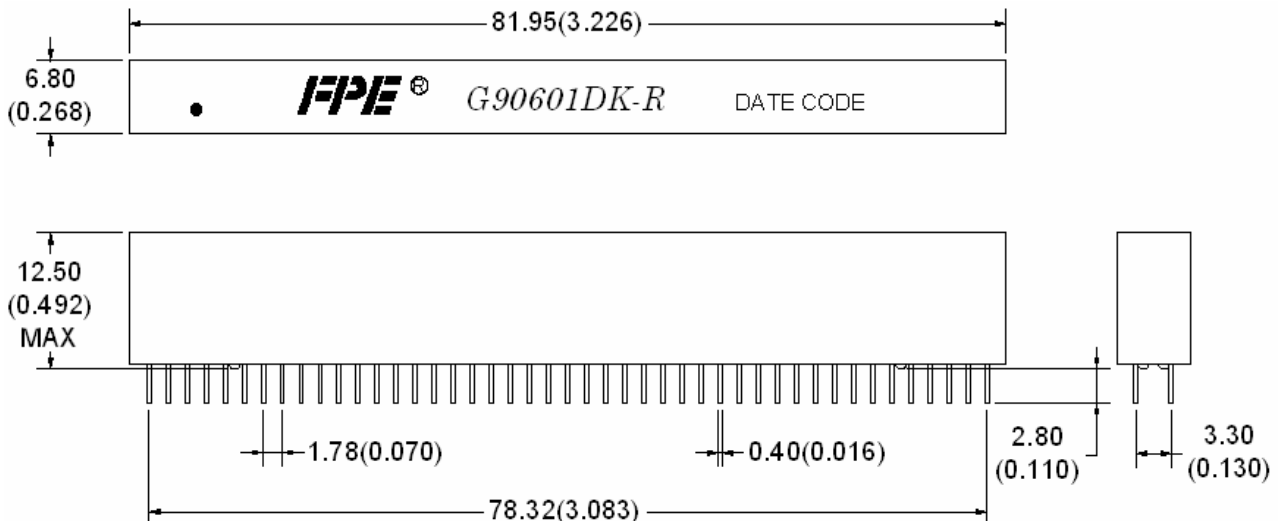

Units:mm(Inches) Tolerance :xx.x0±0.25(0.010) Weight..... 12.5g typ
 0.xx±0.05(0.002) Tube.....6Pcs

100/1000BASE-T FIVE TRANSFORMER MODULES

SCHEMATICS

G90601DK-R

