


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C




Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz, 0.1V	Turns Ratio
PW01319ST	5-4	5-4 (Short other pins)	(5-4):(2-1):( 9,10-6,7)
	100.5uH±10%	1.1uH Max	1:0.333:0.333±2%

Continue				
DCR			HI-POT	
5-4	2-1	9,10-6,7	PRI ,AUX to SEC	PRI to AUX
140mΩMax	230mΩ Max	25mΩ Max	1500VAC/5mA/60S	600VAC/5mA/60S

**MECHANICAL(Unit:mm)**

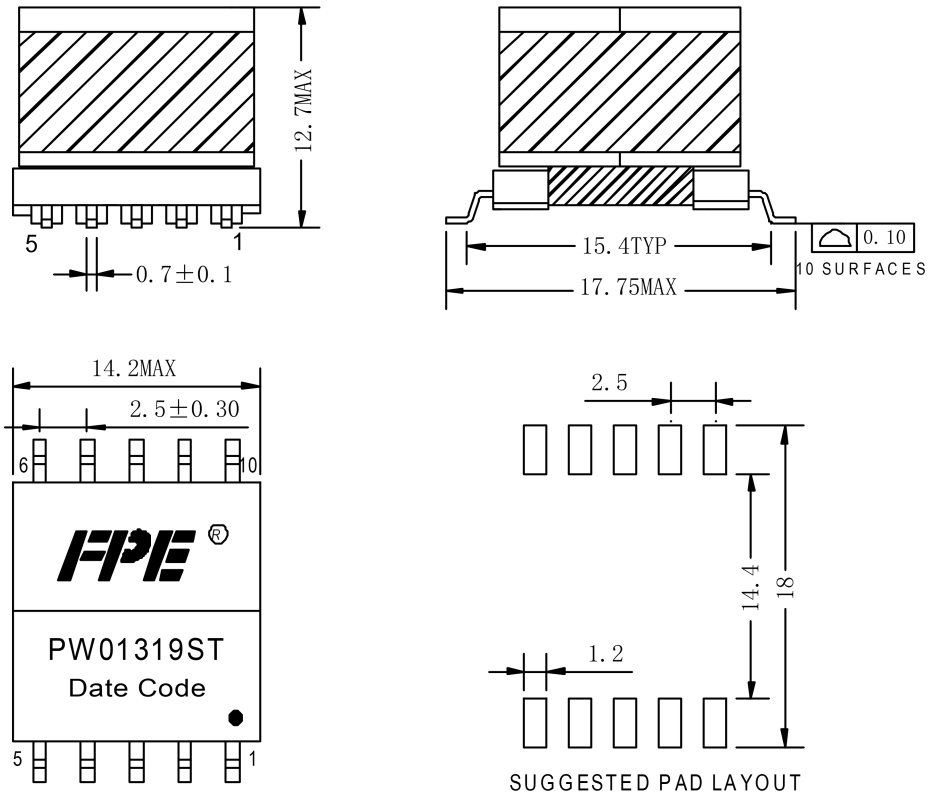

**SCHEMATICS**

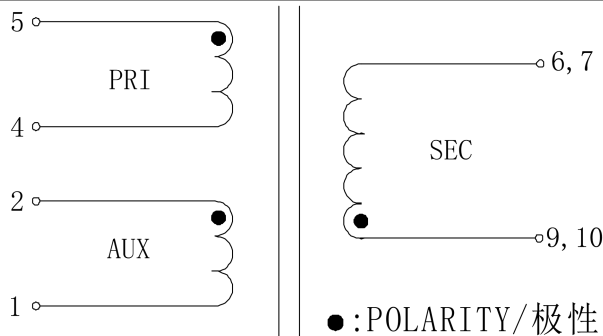

NOTE: PIN6, 7&9, 10 must shorted on PCB