


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C



Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz,1.0V	Turns Ratio@20KHz,1.0V
PW01335ST	3-2	3-2(short other pins)	(3-2):(7,8-5,6)
	55uH±10%	2.5uH Max	24:5±3%

Continue			
DCR@25°C		Hi-pot	
3-2	7,8-5,6	Np,CORE to Ns	Np to CORE
160mΩ Max	20mΩMax	1500VAC/1mA/60S	500VAC/1mA/60S

**MECHANICAL(Unit:mm)**

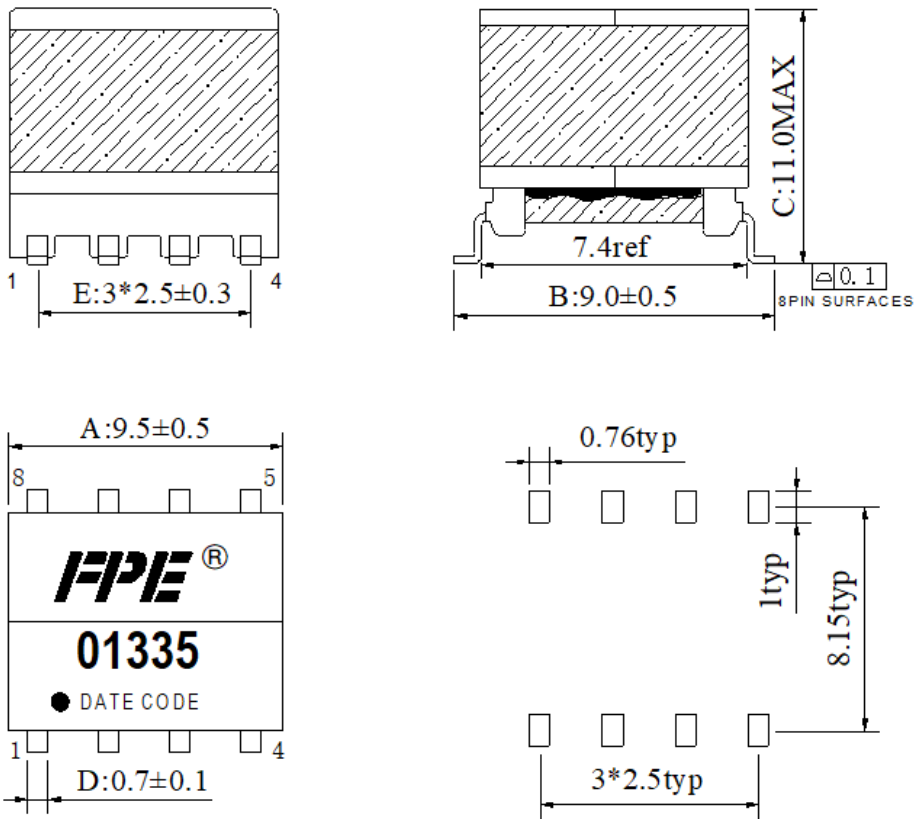

**SCHEMATICS**

