


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C




Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz,0.1V	Turns Ratio
PW07054ST	1,2-3,4	1,2-3,4 (Short other pins)	(1,2-3,4):(5-6):( 12,11,10-9,8,7)
	20.5uH±10%	1.0uH MAX	1:0.438:0.375±3%

Continue			
DCR			HI-POT
1,2-3,4	5-6	7,8,9-10,11,12	PRI,AUX to SEC
39mΩ Max	230mΩ Max	8.5mΩ Max	1800VAC/5mA /60Sec

**MECHANICAL(Unit:mm)**

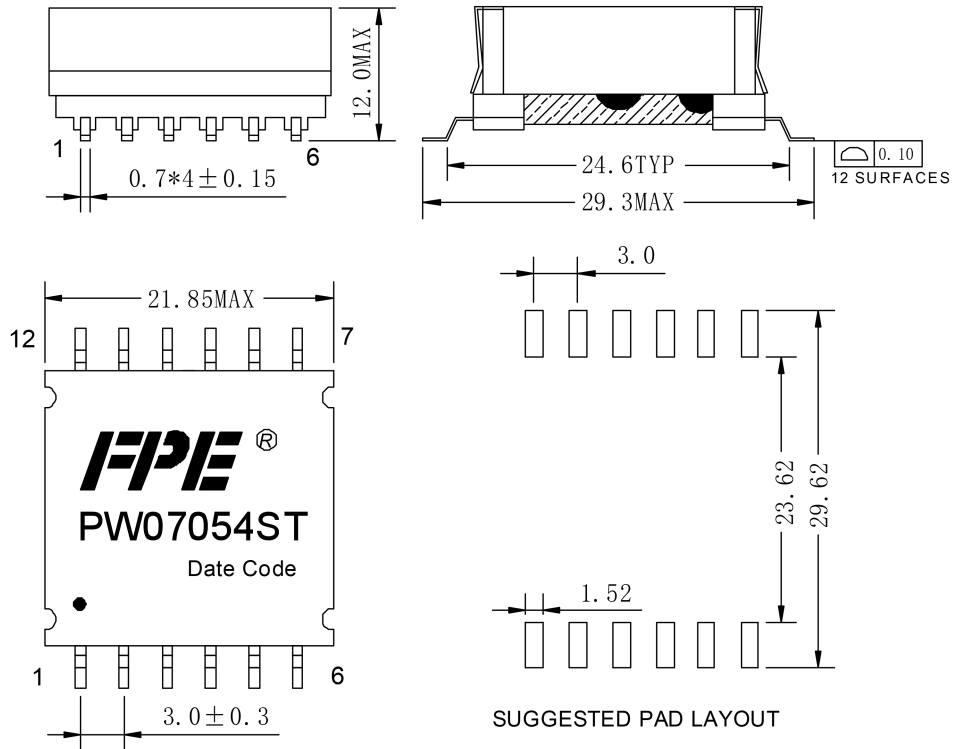

**SCHEMATICS**

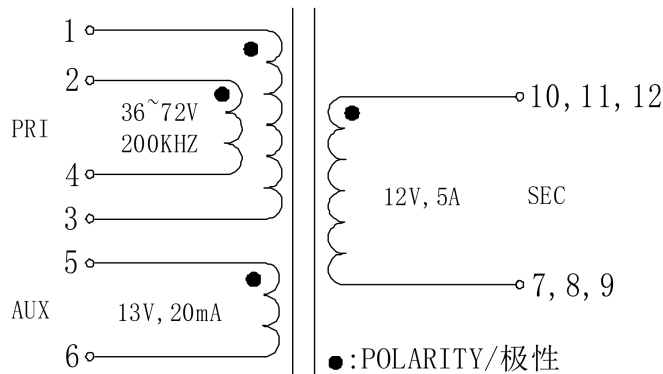

NOTE:PIN1, 2&3, 4&7, 8, 9&10, 11, 12 must shorted on PCB